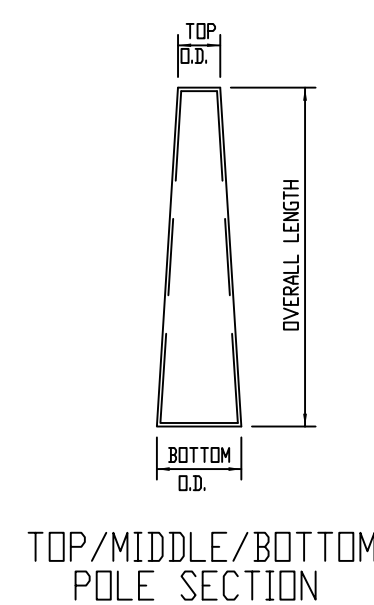


POLE DATA TABLE											
POLE TYPE	PIECE MARK	MAX NUMBER OF X-ARMS	POLE SECTION	TOP O.D. (INCHES)	BTM. O.D. (INCHES)	OVERALL LENGTH	STRAIGHT LENGTH	TAPER LENGTH	THICKNESS (INCHES)	TOP OF STEEL	ASTM REFERENCE
LSS110C	MP-5BTDSA-7	3	FIXTURE MOUNTING	10.150"	15.965"	41'-6 3/8"	-----	41'-6 3/8"	.179	107'-0" NIM. 108'-8 3/8" EXP.	A595A (F-y>5 ksi) or A572, Gr 55 or 65
	MP-7BDSA			14.954"	20.770"	41'-6 3/8"	-----	41'-6 3/8"	.209		A595A (F-y>5 ksi) or A572, Gr 55 or 65
	MP-8BTDSA-D			14.992"	24.047"	32'-6 3/8"	-----	32'-6 3/8"	.313		A595A (F-y>5 ksi) or A572, Gr 55 or 65
	MP-7BDSA		PRECAST BASE				FOR PRECAST MEMBER PROPERTIES SEE PRECAST BASE DETAIL A/-				

BSA-100CBT-A

DSA-POLESCHÉ_C